

# HIGH LUMINANCE LED STROBOSCOPE

## DS-9000

**Keyboard Operating, Wide  
Range, High Accuracy.**

**Range:** 40.0 to 99,999 RPM/FPM  
**Trigger Duty:** 68uS. at 5,000 FPM  
 12uS. at 30,000 FPM  
 6 uS. at 60,000 FPM  
 4.5uS. at 90,000 FPM

**LED Lamp:** 12 pcs high power  
 LED lamps more brighter.

**Display:** LCD with back light.

**Power:** 100-240V AC Adaptor /  
 DC5V 3A

**External Trigger Input:** Max.  
 DC12V, (Signal, Ground)


**External Trigger Range:** Below  
 10,000 FPM (166.6 Hz)

**Signal Output:** DC signal 12V  
 (3.5mm phone jack)

(Individual Input and Output jacks  
 provided for multi strobes,  
 triggering from a source  
 stroboscope.)

**Timer:** 1,5,10 minutes, continuous

**Internal Phase Shift:** Adjustable  
 1°/step, keep the target precisely  
 in view

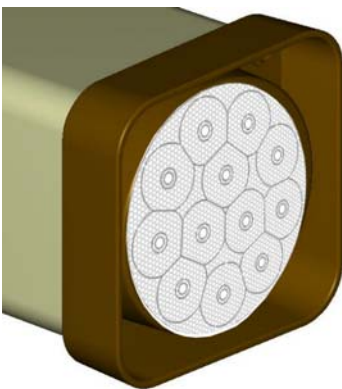

DS-9000



**SAGA ELECTRONIC ENTERPRISE CO., LTD.**

4F, No.56, LANE 31, MINZU ROAD, DANSHUI,  
 NEW TAIPEI CITY, TAIWAN 251-67  
 TEL: 886-2-8809 2338 FAX: 886-2-8809 2445  
<http://www.saga-electronic.com>  
 email:sagaleu@ms8.hinet.net